

SK-LED54B/T  
SK-LED160B/T

User Manual for Sevenoak LED Lights

### Attention


1. Please do not put the LED Light into the situation that the temperature is higher than 60°C, it may damage the components of the LED light.
2. To prevent water or dust, please keep the device away from rain or humidity, this product is not waterproof and anti-dust.
3. Please do not use the organic solvent such as diluents, alcohol etc to clean the surface of the LED light, it may damage the outer components.
4. Under normal use, the LED light will generate a certain amount of heat, to avoid overheating, please do not use the LED light under strong ray for a long time.
5. Please take the battery out and put them in a dry place if you do not use the LED light for a long time.

### Warning

1. Please do not flash the LED light when facing human eyes (especially baby's eyes) in short distance, this may cause vision disorder in a short time.
2. Please do not use the LED light near the chemicals, special substance or the inflammable gas, fire disaster or electromagnetic interference may occur because these substances may be sensitive to the momentary hard light in the specific situation. Please be attention to the related warning sign in these places.
3. Please replace the battery with the specified battery to avoid any danger.

### Components


1. AA battery compartment cover/lithium battery holder
2. AA battery compartment
3. AA battery compartment lock
4. Hot shoe mounting foot
5. DC power socket
6. Light adjust button
7. Hot shoe mounting foot
8. Battery indicator
9. Power switch
10. Battery indicator switch

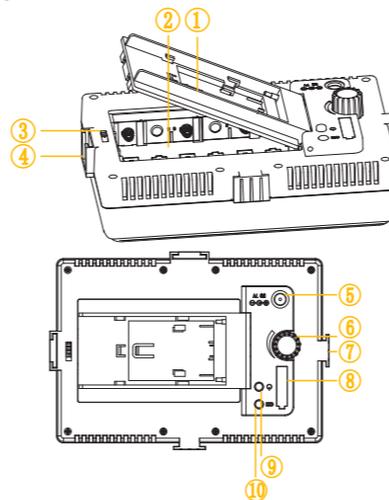

### Battery Installation

#### AA Battery Installation


Open the battery compartment cover as shown by the arrow, insert four or six AA into the battery compartment. Make sure the positive and negative battery contacts are properly oriented as shown in the compartment. Push down the cover. Please use new battery of same brand. When power off, please change all the batteries, do not mix the old battery up with the new ones.

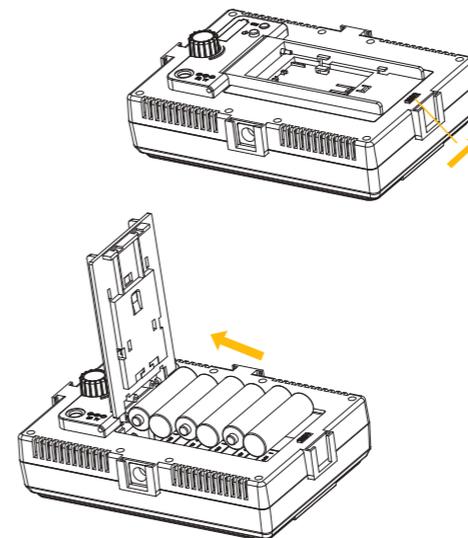

#### Lithium Battery Installation

Insert the compatible lithium battery shown on the LED light, then push down the cover.

\* Compatible Lithium battery: Sony NP-F550 , NP-F570 etc

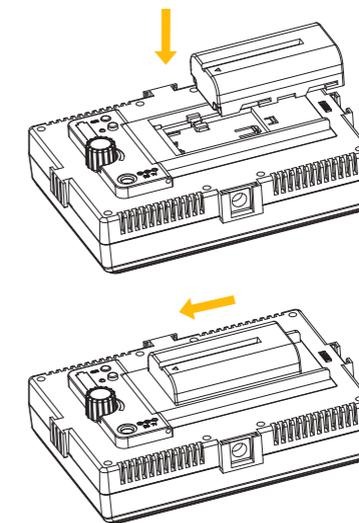


#### DC Power Installation

Select a proper power source adapter according to the DC power specification shown on the LED light, connect the power correctly, then insert the power source to the mark ⑤ on the LED light.


## Adjust the angle

The angle of the LED light can be adjusted (as shown in the following picture) with the included ball head and hotshoe adapter.




## Install the color filter

Insert two side of the color filter to the card slot on the LED light, and ensure the color filter is securely fastened.



## Basic use:

- 1. Use the LED light to fill light:**  
Connect the LED light to the power source, and turn on the power switch ⑨, the LEDs are lit up. Turn light adjust button to adjust the brightness or color temperature to the optimum state, now is ready to use. After you've finished shooting, switch the power off. When re-start the LED light, its brightness or color temperature states the same as last time. If the shooting environment is changed, the brightness or color temperature needs to adjust gain.
- 2. Use the color filter**  
Insert a suitable color filter to the LED light according to the shooting environment, to make the effect better.
- 3. Multiple light combinations**  
Different shooting environment may need different LED lights, Sevenoak LED lights can be combined together to achieve different effects.
- 4. LED Battery Indicator**  
Connect the LED light to the power source, press the LED battery indicator button ⑩, battery indicator ⑧ is on, the battery state is clearly displayed by four LEDs. When the battery power is low or off, it should be replaced immediately.

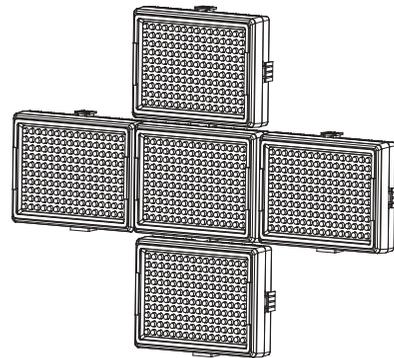

Model No. Functions	SK-LED54B	SK-LED54T	SK-LED160B	SK-LED160T
Battery	4xAAA(1.5V)/battery NP-F550 DC:7.5V /2A	4xAAA(1.5V)/battery NP-F550 DC:7.5V /2A	6xAA(1.5V)/battery NP-F550 DC:7.5V /2A	6xAA(1.5V)/battery NP-F550 DC:7.5V /2A
Color Temperature	5600K±300K	3200K-5600K±400K (Adjustable)	5600K±300K	3200K-5600K±400K (Adjustable)
LEDs	54 High Intensity 6000MCD LEDs	54 High Intensity 6000MCD LEDs	160 High Intensity 6000MCD LEDs	160 High Intensity 6000MCD LEDs
Power	3W	9W	13W	10W
Weight	160g	160g	240g	240g
Work Environment	-20 C ~ 60 C			

## Warnings

- Please read and follow these instructions, and keep this manual in a safe place.
- Handle the unit with care.
- Clean the unit with a soft, dry cloth.
- Use only parts provided by the manufacturer.
- Make sure everything is secure before proceeding.
- Make sure the item is intact and that there are no missing parts.
- Do not exceed the maximum load capacity.
- All photos are for illustrative purposes only.

## Limited One-year Warranty

Sevenoak provides a limited warranty that this product is free from defects in materials and workmanship to the original purchaser under normal use for a period of one (1) year from the original purchase date or thirty (30) days after replacement (the "Warranty Period"), whichever occurs later. Our responsibility with respect to this limited warranty shall be limited solely to repair or replacement, at its option, of any product which fails during normal consumer use. To obtain warranty coverage during the Warranty period, contact your place of purchase ("Seller") to obtain a return merchandise authorization ("RMA") number, and return to Seller the defective product along with proof of purchase and the RMA number.

This warranty does not extend to damage or failure which

results from misuse, neglect, accident, alternation, abuse, improper installation or maintenance. EXCEPT AS PROVIDED HEREIN, SEVENOAK MAKES NEITHER ANY EXPRESS WARRANTIES NOR ANY IMPLIED WARRANTIES, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. This warranty provides you with specific legal rights, and you may also have additional rights which vary from state to state.

## Components

- LED Main Body
- Small ball head
- Fog White color filter and orange color filter
- Instruction



# 深圳市长丰影像器材有限公司

产品/零件名称	SK-LED说明书	比例	1 : 1	版本	V01
工程图号	SK-LED说明书V01	物料描述	105双铜、双面，五折页、虚线压痕		
物料编号	1F14015SK0068	尺寸/用量	尺寸：475x140mm	1PCS	
制图人/日期	吴蒙蒙/2016/8/9	审核/日期			